


**TUNING FORK CRYSTAL UNIT (SMD • Ceramic Package)**

RoHS compliant / Pb free

**CM315**


3000pcs/reel

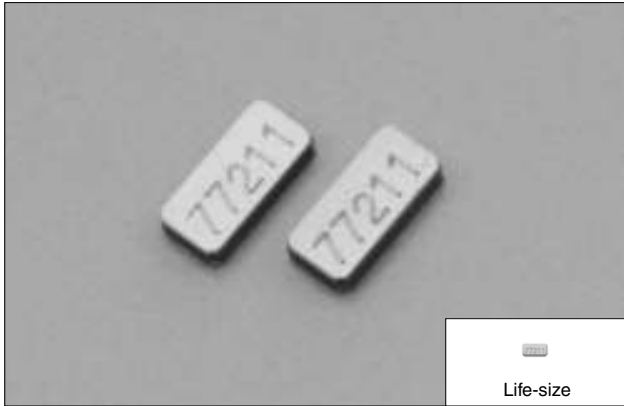


**FEATURES**

- Tuning fork crystal with ceramic packaged type.
- High-density SMD type  
Ultra-light weight with ultra-miniature packaging.  
High-stability assured with tight vacuum sealing.
- Most appropriate for portable devices and mobile telecommunications devices.

**DIMENSION [mm]**

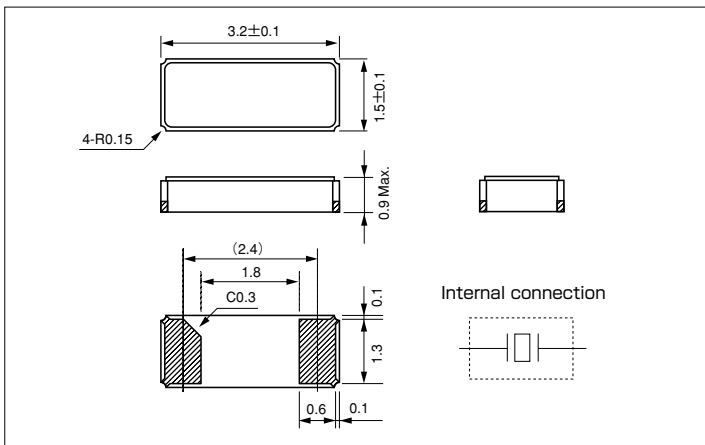

**SOLDER PAD LAYOUT [mm]**

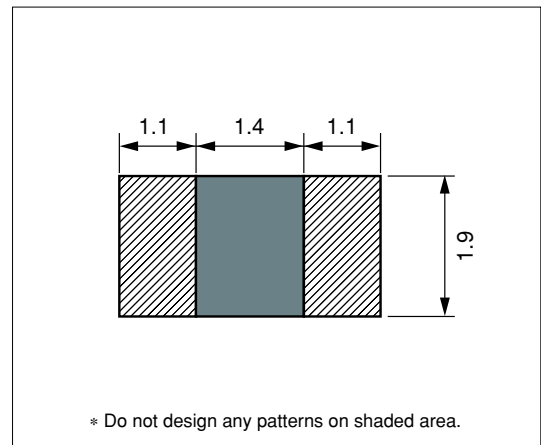

**STANDARD SPECIFICATIONS**

Item	Model	CM315	Conditions
Nominal Frequency	$f_0$	32.768kHz	
Frequency Tolerance	$\Delta f/f_0$	$\pm 20$ ppm	at 25°C
Load capacitance	$C_L$	9.0pF, 12.5pF	Need to specify your requirement
Operating Temperature Range	$T_{OPR}$	-40°C ~ +85°C	
Storage Temperature Range	$T_{STR}$	-55°C ~ +125°C	
Turnover Temperature	$T_M$	25°C $\pm 5$ °C	
Temperature Coefficient	$\beta$	$-0.034 \pm 0.006$ ppm/°C <sup>2</sup>	
Motional (series) resistance	$R_1$	70KΩ Max.	at 25°C
Level of drive	DL	1 μW Max.	
Aging (first year)	$\Delta f/f_0$	$\pm 3$ ppm Max.	25°C $\pm 3$ °C
Shunt capacitance	$C_0$	0.95pF Typ.	