



actual size

SMD Quartz Crystal · JXS22-WA

for wireless applications · 2.5 x 2.0 mm

- perfect reference crystal for wireless applications
- for IoT using BlueTooth, ZigBee, NFC and more
- high frequency stability and low ESR
- metal lid allows EMI shielding



General Data

type	JXS22-WA
special frequencies for wireless applications	14 standard frequencies shown in ESR list (for other frequencies refer to general JXS22 datasheet)
frequency tolerance at 25 °C	± 10ppm *
load capacitance C_L	8pF / 10pF / 12 pF *
shunt capacitance C_0	< 3 pF
storage temperature	-40 °C ~ +105 °C
drive level max.	100 μ W (10 μ W recommended)
aging	< ± 1 ppm first year

* for different specs please ask for availability

ESR (series resistance Rs)


frequency in MHz	vibration mode	ESR max. in Ω	ESR typ. in Ω
16.0	fund. - AT	80	50
19.20	fund. - AT	70	40
20.0	fund. - AT	60	35
24.0	fund. - AT	50	25
25.0	fund. - AT	50	25
26.0	fund. - AT	50	20
27.120	fund. - AT	50	20
30.0	fund. - AT	50	20
32.0	fund. - AT	40	20
37.40	fund. - AT	40	20
38.40	fund. - AT	40	20
40.0	fund. - AT	40	20
48.0	fund. - AT	40	20
52.0	fund. - AT	40	20

Frequency Stability vs. Temperature

		± 10 ppm	± 13 ppm	± 15 ppm	± 20 ppm	± 25 ppm	± 30 ppm
-20 °C ~ +70 °C	STD.	●		○	○	○	○
-30 °C ~ +85 °C	T(-30/+85)		○	○	○	○	○
-40 °C ~ +85 °C	T1		D	●	○	○	○
-40 °C ~ +105 °C	T2					D	●

● standard ○ available D ask if available

Dimensions

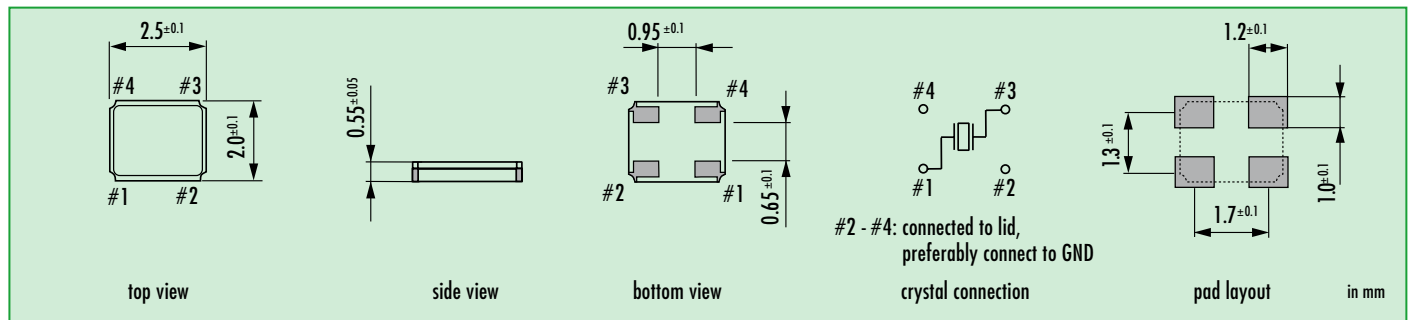

Order Information

Q	frequency	type	load capacitance	tolerance at 25 °C	stability vs. temp. range	option 1	option 2
Quartz	see frequencies in ESR list	JXS22	8 / 10 / 12 pF	10 = ± 10ppm std.	10 = ± 10 ppm 13 = ± 13 ppm 15 = ± 15 ppm 20 = ± 20 ppm 25 = ± 25 ppm 30 = ± 30 ppm	blank = -20 °C ~ +70 °C T(-30/+85) = -30 °C ~ +85 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C FU = for fundamental frequencies ≥ 20 MHz	WA = for wireless application

Example: Q 26.0-JXS22-12-10/15-T1-FU-WA-LF (Suffix LF = RoHS compliant / Pb free pins or pads)