


**DIMENSIONS**

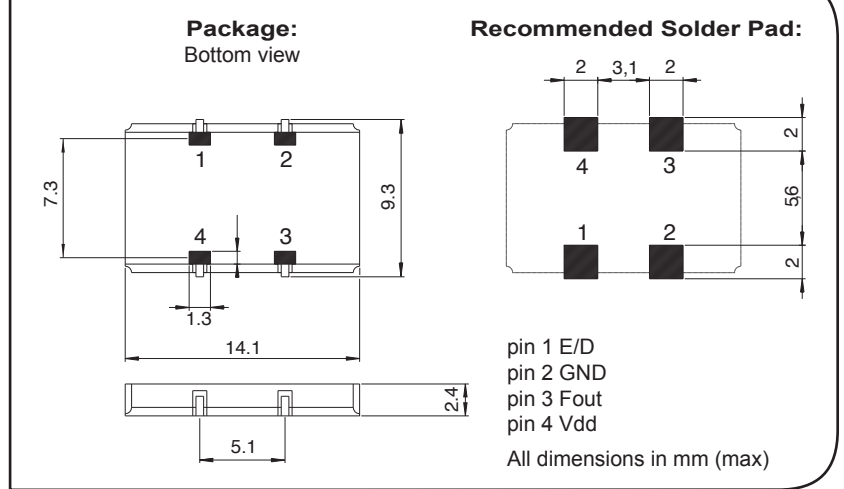

**SMT Clock oscillator in ceramic package**  
**Fundamental quartz mode frequency**  
**High shock and vibration resistance**  
**Wide temperature range**  
**Low aging**  
**Ultra low MSL**  
**Very fast start-up**  
**Swiss made quality**  
**Customer specification on request**

**DESCRIPTION:**

This SMD oscillator in ceramic package has been specially designed for surface mount using infrared, vapor phase or epoxy techniques.

**APPLICATIONS:**

- Avionics
- Airbone equipments
- Remote control
- Security application
- Radio Transceiver
- Microprocessor clocks

The MCSO's are supplied on trays (50 pcs / tray)  
 For pick-and-place equipment, the parts are available in 24mm tapes with 250 parts min  
 500 parts max

**ELECTRICAL CHARACTERISTICS AT +25°C**

<b>Frequency stability</b> Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 10 years over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 100$	ppm
<b>Frequency stability version T</b> Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 1 year over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 50$	ppm
Supply voltage ± 5% 1)*	Vdd	2.5 / 3.3	V
Input current	Idd	see table 1	
Output signal		HC-MOS compatible	
Symmetry at Vdd/2		40 / 60	%
Rise & fall time ≤ 20MHz (load 15pf 20% to 80%)		≤7	ns
Rise & fall time ≥ 20MHz (load 15pf 10% to 90%)		≤3	ns
Level "0" & "1"		<0.4>Vdd-0.5	V
Start-up time (typ/max)	t	1/5	ms
Load min / max		3/47	pF
Jitter ≤ 20MHz one sigma		<2 rms	ps
Jitter > 20MHz one sigma		<10 rms	ps

**TABLE 1: Idd  
(Without load)**

Frequency	F= $\leq$ 10MHz	$\leq$ 20MHz	$>$ 20 to 160MHz
W = Vdd = 2.5V	$<$ 2mA	$<$ 3mA	$<$ 25mA
V = Vdd = 3.3V	$<$ 4mA	$<$ 5mA	$<$ 30mA

**STANDARD FREQUENCIES:**

Frequency «MHz»						
3.6864	4	8	10	12	12.8	14.7456
16	20	24	40	48	120	160
Other frequencies from 10 kHz up to 225 MHz on request						

**ENVIRONMENTAL  
CHARACTERISTICS:**

Storage temp. range	-65 to 125°C
Vibration resistance	10 to 2000Hz / 20g
Shocks resistance	5000g / 0.3ms / ½ sine

**TERMINATIONS AND  
PROCESSING:**

Reflow soldering	+260°C / 10s max
Package	Ceramic 14 x 9mm x 2.4mm
Lids	Kovar
Termination option 2 on request	GJ/L: with Au terminations J/L J/L: with tinned Ag/Cu/Zn J/Leads pins Height 3.8mm included J/Leads
E/D option 1 on request Reaction time $<$ 1 $\mu$ s	Pin 1 open $\rightarrow$ Pin 3 Clock H $\rightarrow$ Clock L $\rightarrow$ Low

- No power E/D function (pin 1) before Vdd is setting on
- E/D option not available for F  $<$  500 kHz
- E/D option on request (very low consumption in disable mode).

**PRODUCT DESCRIPTION AND  
ORDERING INFORMATION:**

MCSOF H V T - C 48MHz E/D GJ/L XXX

<p>H <math>&gt;</math> 20MHz</p> <p>blank <math>\leq</math> 20MHz</p> <p>W = Vdd 2.5V</p> <p>V = Vdd 3.3V</p> <p>T = <math>\pm</math>50 ppm</p> <p>blank = <math>\pm</math>100 ppm</p> <p>A = 0 to +70°C</p> <p>B = -40 to +85°C</p> <p>C = -55 to +125°C</p> <p>X = custom</p>	<p>option 1 E/D enable / disable</p> <p>option 2 blank Au plated J/L = J-leads GJ/L = Au J-Leads</p> <p>customer spec N°</p>
---	--

Frequency \_\_\_\_\_

A unique part number will be generated for each product specification: i.e:

20xxxx-EA00	xxx pcs (in ESD plastic tray)
200xxx-PP00	xxx pcs (in tape & reel, any quantity)

All specifications subject to change without notice.

